




Quick Start Guide
Track-Eye

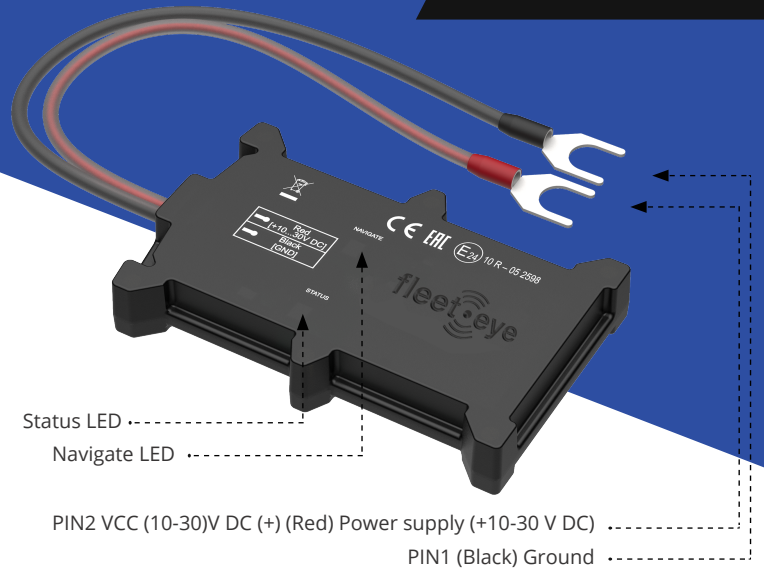


Installation

Track-Eye is connected to the battery of the vehicle or asset and mounted using the double sided tape on the bottom.

- Red wire to battery +
- Black wire to battery ÷


Power supply: Min. 10 V, Max. 30 V.

In order to ensure the best possible GSM and GPS reception, Track-Eye should always be placed, so the side with the product label and status LEDs are facing upwards.

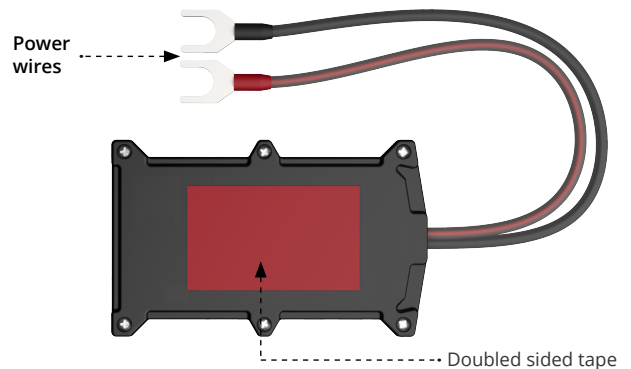

Wire protection

In order to ensure long lasting functionality and maintain the product warranty, all wire connections must be protected against water and moisture.

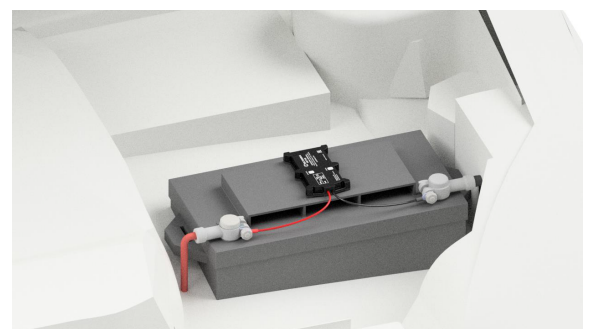

Example of Track-Eye mounting

For technical questions, please contact Fleet Eye Support
support@fleet-eye.com

www.fleet-eye.com

0330 1132589

Fleet-Eye Ltd
Unit 5, Saxon House
Headway Business Park
Corby, Northants. NN18 9EZ

[version 1.0]

